


CUTTABLE SUPPORT

# JENNMAR FIBREGLASS THRUST DOWELS

## Features

- Used for ground support where extraction includes cutting of bolts
- Thrust dowels eliminate tails protruding, reducing the risk of damage to support by mobile equipment
- No threaded tails protruding reduces risk of personal injury when walking around equipment installations
- "V" notched end to promote shredding of resin capsule film
- Continuous rope thread providing large deformations for resin mixing and high bond strength with the rock
- 22mm diameter dowel for high strength and maximum encapsulation by volume
- Entire dowel and nuts are colour coded for length
- Recommended for drill hole diameters 33 – 35mm

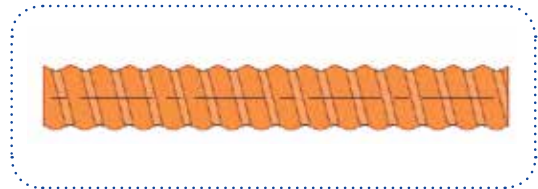

CUTTABLE SUPPORT

Rod Diameter (mm)	UTS Rod (Tonne)	UTS with Nut (Tonne)	Rod Single Shear Strength (kN)	Shank Torque (N.m)
22	>25	>5	>55	>80

**Packaging:** Standard Pack = 250, but customer specific packaging is available

**Colour Code:**

Bolt Length (m)	Colour
1.2	Blue
1.5	Orange
1.8	Red
2.1	Green



Jennmar Australia Pty Ltd products are manufactured and supplied to the specifications shown on our product information sheets, or to an agreed customer specification. The customer (purchaser) is responsible for checking the suitability of products for their intended use. Furthermore, we make no representation about the time or costs associated with your installation of the products.