


CUTTABLE SUPPORT

EXTRA HIGH TORSION (XHT) TENSIONABLE BOLT

Features

- Used for coal rib support where extraction includes cutting of bolts
- Extra high torsional strength material minimises risk of damage to fibreglass when tightening
- Break-out cap is designed to break into small pieces to clear easily from spanners/dollies
- "V" notch end to promote shredding of the resin capsule film
- Continuous rope thread providing large deformations for resin mixing and high bond strength with the rock
- 22mm diameter dowel for high strength and maximum encapsulation by volume
- Recommended for drill hole diameters 27 – 28mm

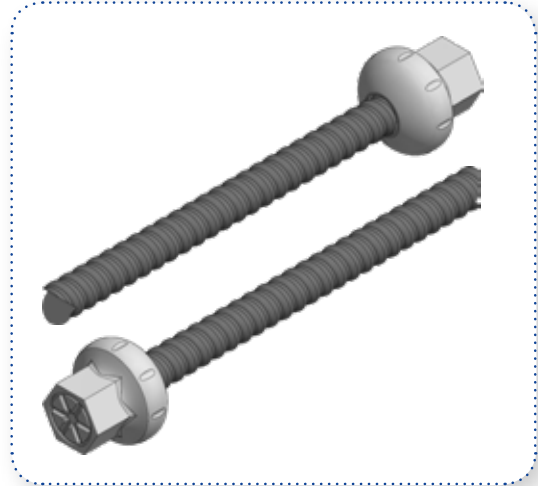

CUTTABLE SUPPORT

Rod Diameter (mm)	UTS Rod (kN)	UTS with Nut (tonne)	Rod Single Shear Strength (kN)	Shank Torque (N.m)
22	>230	> 6	> 50	>250

Packaging: Standard Pack = 250, but customer specific packaging is available

Colour Code: ALL Jenmar XHT tensionable dowels are grey in colour

Application	Nut Break-out (N.m)	Colour
Hydraulic rib bolters	80 - 110	White
Hand held windy borer	30 - 50	Blue

