


MIXING SPANNERS

COAL PARTS LIST

	Socket Code	Description	Application
Cable Bolt Spanners	28	TG Bolt Drive c/w water flushing seal – painted GREEN	TG Bolt and SUMO Cables
	20	SuperStrand drive located internally at base of spanner to fit over 21.8mm x 19 wire cable – Painted RED	SuperStrand
	21	Combined drive in base of spanner with a standard 36mm Hex A.F. socket on top. Painted RED	SuperStrand & roof bolts
	14	Replaceable drive, round socket with grub screw on top of spanner to suit replaceable "flower" drives. Painted RED	Any sized cable bolt
Rock Bolt Spanners	5	Standard 36mm Hex A.F. socket, with high tensile seat to prevent wear.	Torque Tension, Hex Forged Head Bolts

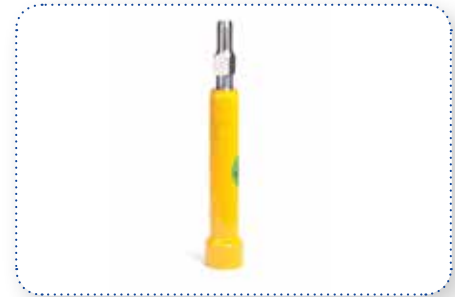

Drive Code	Description
1	19mm Hex
6	Standard 22R/25S/24R – 25mm square drive
9	28mm square