


## ROCK BOLTS

**PYTHON BOLT****Features**

- Suitable for common civil and hardrock drill hole diameters
- Lengths up to 8m
- Complete range of face plates to suit
- High pressure injection pumps and accessories are available. New high flow rate air/water pump
- Specifically developed water injection dollie to fit Jumbo machines to allow percussion installation in collapsed holes and the ability to slide through centralisers
- Molecular attachment water based coating that doesn't crack when bolt is inflated. 10 x better than galvanising in salt spray and acid testing
- Python Eye PATENT PENDING allows for easier insertion in damaged holes
- Specifically designed dollie and python eye allows for installation and inflation in collapsed drill holes and very poor ground
- Independent test data available for varying coating performance

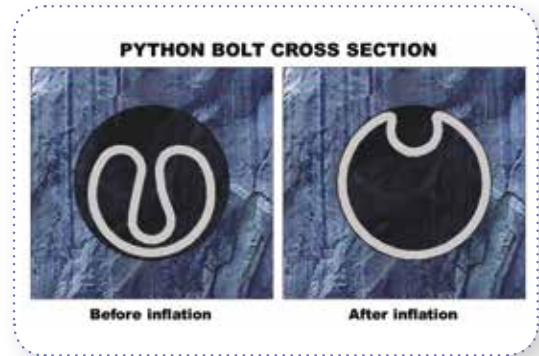

Specification S Type	Tube Thickness (mm)	Inflated Bolt Diameter (mm)	Drill hole diameter (mm)	Minimum UTS (kN)	Feed Material %
STANDARD	2	41	35 - 38	120	25
MIDI	2	54	45 - 51	160	25
SUPER	3	54	45 - 51	240	25

Mass/metre	
STANDARD	2 kg/m
MIDI	2.8kg/m
SUPER	3.75kg/m