


CABLE BOLTS

FISH HOOK DEBONDED HOLLOW TG CABLE BOLT

Features

- All the features of the TG Cable Bolt
- Fish Hook load tested to 200kg
- Easy installation from the ground, jumbo or integrated tool carrier
- Load transferred through a single hollow cable
- Process ensures full encapsulation of the TG Cable Bolt
- Available with pressure tested Grout adaptor or M20 thread for PUR injection
- Recommended for a 45mm drill hole
- Available in plain hollow strand, point anchor bulbing or fully bulbed
- Debonding length supplied as requested
- Supplied plain or debonded
- No requirement for grout or breather tubes
- Supplied in trays

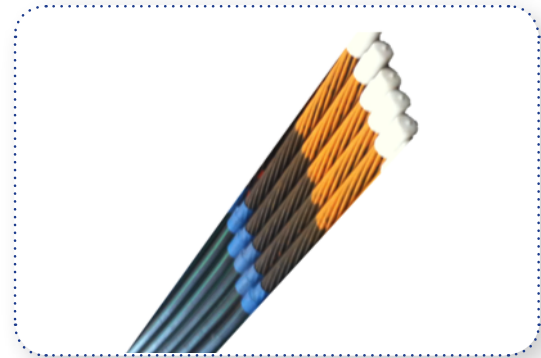

Strand Diameter	Typical Strand Yield Strength	Typical Breaking Load		Elongation at Strand Failure
		Strand	Strand at B&W	
28mm	560kN	620kN (63 Tonne)	540kN (55 Tonne)	5 - 7%