



## STEEL MESH

**MESH ROLLS****Features**

- Wire diameters, spacing and overall dimensions can be customised to suit particular applications
- Customised paint lines along the modules to suit roof bolt patterns
- Wire = 350 to 500MPa
- Supplied product and specifications
- Double twist to reduce unravelling opportunity
- Re-inforced areas for lateral linking of rock bolt across the ground

**Packaging**

- Supplied in 25 to 50 metre rolls
- Bundle sizes to suit the customer

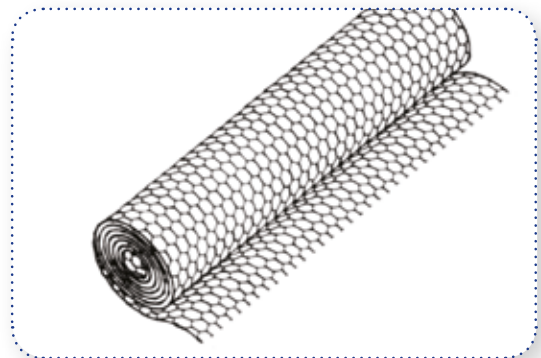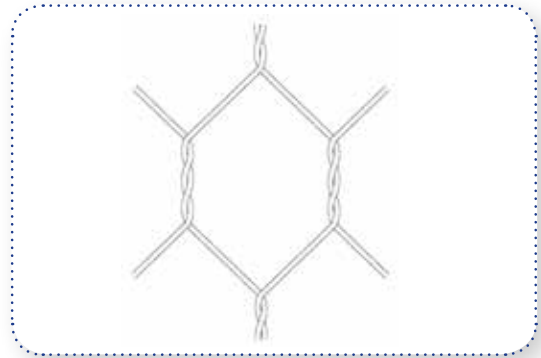

Component	Strength	Standard
Wire	2.7 - 3.7mm	Are in accordance with EN10218
Dynamic Capacity	Absorbed Energy = 10.7kJ	For 2.7mm wire tested
Galvanising	-	AS2423:2002 to type W02Z