


## CUTTABLE SUPPORT

# JENNMAR PLASTIC MESH

## Features

- Biaxial Polypropylene grid - Lightweight, easy to handle
- Used in highly corrosive areas
- Flexible for installation on uneven surfaces
- Complies with the requirements of MDG 3006 MRT8 (Draft Jan 2007) 7.2a for Fire Resistance
- Flammability NCB Specification 245:1985 Appendix 2 & 3 Compliant
- Customised packaging to suit each customer, including zip ties every 2m to maintain roll during advance
- Will not corrode

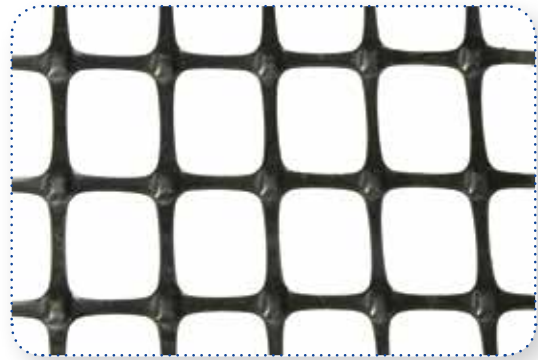

Specification	Value
Colour	Black
Aperture	40 x 30 mm
Peak tensile strength	> 30 kN/m
Yield point elongation	10 – 14 %
Standard roll height	Up to 4 m
Standard roll length	Up to 60 m
Mass per Unit Area	435 g/m <sup>2</sup>