


Plates

Roll Top Plate

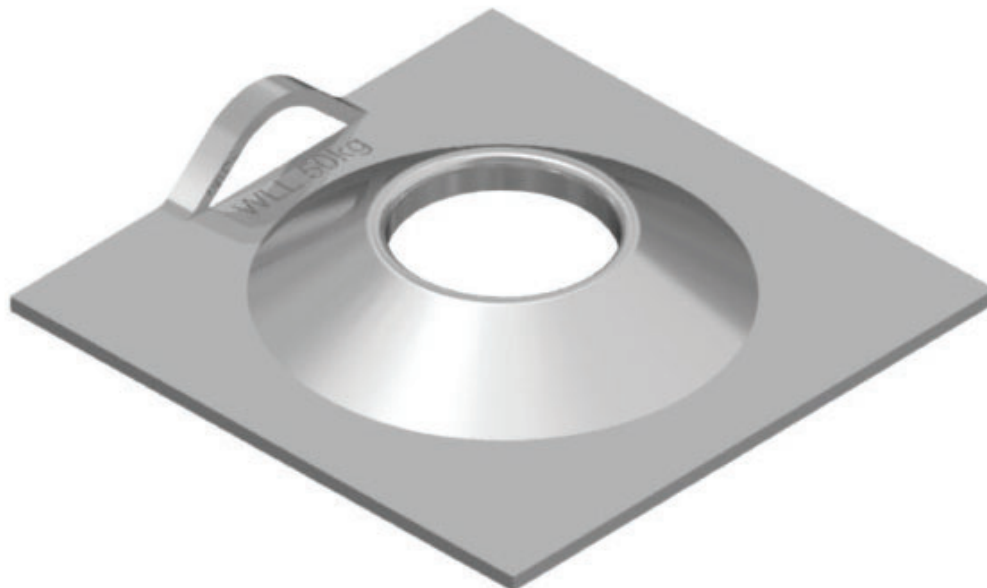

Features:

- Designed to be used with 39 and 47mm diameter friction loks
- JENNMAR 39 and 47mm friction loks use the same roll top plate to reduce stock holding and for ease of installation
- Load rated hangars to 50kg WLL
- Can be supplied as a combination butterfly or pizza pan plate with 300mm² and 450mm² outside diameter
- Available in black, hot dipped galvanised. or Armorgalv

| Dimension (mm) | Thickness (mm) | Hole diameter (mm) | Minimum Collapse Load (kN) | Minimum Pull through load (kN) | Mass (kg) | Standard pack |
|----------------|----------------|--------------------|----------------------------|--------------------------------|-----------|---------------|
| 150X150 | 4 | 50 | 98 | 118 | 0.711 | 980/pallet |
| 200x200 | 4 | 50 | 98 | 118 | 1.33 | 500/pallet |

Available in Black or Hot Dipped Galvanised
 Suit 39 & 47mm Friction Lok Bolts
 Conformance Certificates provided for all Civil products