


## Rock Bolt Accessories

### Torque Test Nut

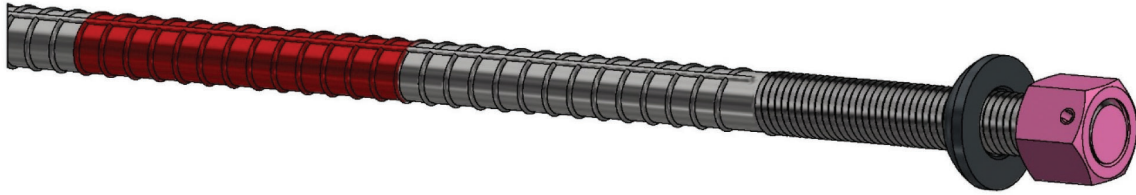

#### Features:

- A high torque roll pin with break-out set to 250-270 N.m break-out
- Colour coded bright pink nut to distinguish from regular bolts
- Can be placed within every bolting pod to ensure bolting rigs are regularly checked for torque output
- The bolt can be installed as part of the normal support pattern, with the high tensile nut being fully rated for X grade roof bolts
- A successful break-out indicates the bolting rigs are able to exceed 8 tonnes pre-tension on normal roof bolts

Bolt Thread	Torque Break-out (Nm)
M24	250-270

MM\_B\_M24CPIN\_Rev1

### 36 A.F. Dolly



#### Features:

- 36mm A.F. socket to suit standard rock bolt installations
- 25mm locking square drive suitable for common coal mining rock bolting rigs

Drive (mm)	Length (mm)	Socket (mm)
25 square	300-600	36 Hex

MM\_D\_JDO650300-Rev1