


# Plates

## Roll Top Plate

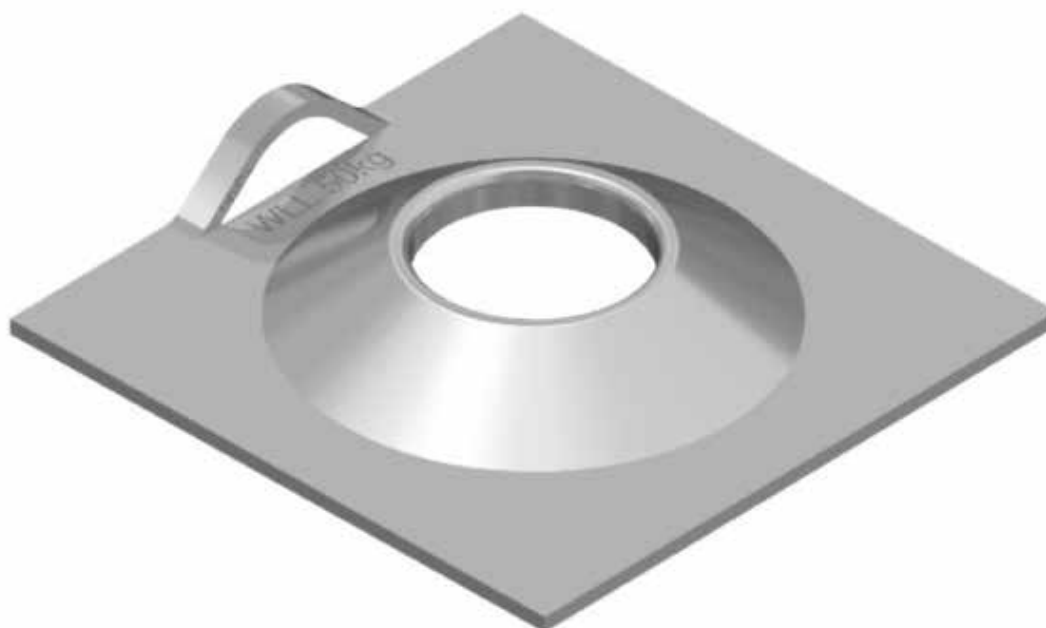

### Features:

- Designed to be used with 39 and 47mm diameter friction loks
- JENNMAR 39 and 47mm friction loks use the same roll top plate to reduce stock holding and for ease of installation
- Load rated hangars to 50kg WLL
- Can be supplied as a combination butterfly or pizza pan plate with 300mm<sup>2</sup> and 450mm<sup>2</sup> outside diameter
- Available in black, hot dipped galvanised. or Armorgalv

Dimension (mm)	Thickness (mm)	Hole diameter (mm)	Minimum Collapse Load (kN)	Minimum Pull through load (kN)	Mass (kg)	Standard pack
150X150	4	50	98	118	0.711	980/pallet
200x200	4	50	98	118	1.33	500/pallet

Available in Black or Hot Dipped Galvanised  
 Suit 39 & 47mm Friction Lok Bolts  
 Conformance Certificates provided for all Civil products