


Plates

Volcano Plate to suit Superstrand and R38 SDHB

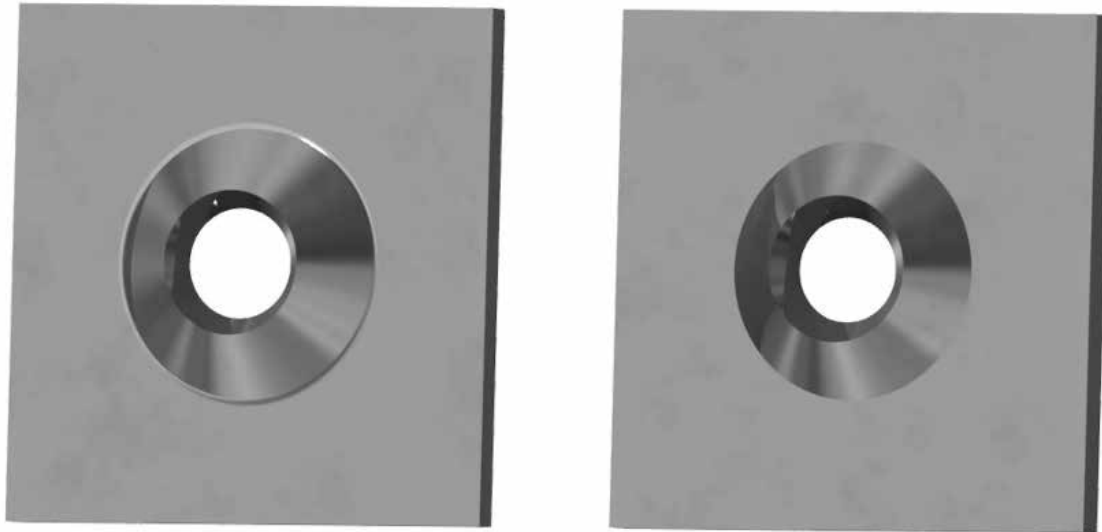

Features:

- Dome profile allows for 18° angles of alignment when installing the cable bolt with a domed barrel
- Available in a range of thicknesses and dimensions to suit design and capacity requirements
- Available as “rumbled” to take off sharp edges

Dimension (mm)	Thickness (mm)	Hole diameter (mm)	Minimum Pull through load (kN)	Mass (kg)	Standard pack	Steel grade
200x200	12	42	343	3.8	200	250
200x200	14	40	441	4.3	200	490

Available in Black or Hot Dipped Galvanised
Conformance Certificates provided for all Civil products