


Mesh

Mine Mesh

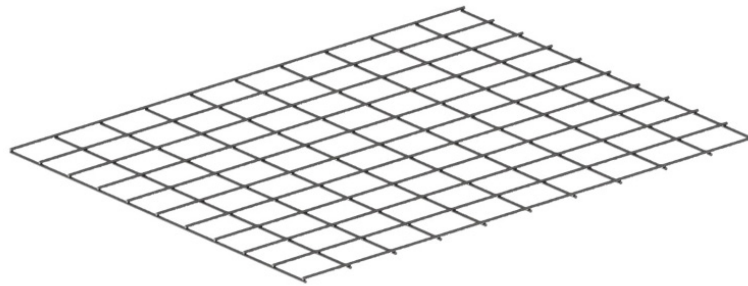

Features:

- Trimmed edges to ensure there is a limited overhang of wire to cause injury when handling
- Weld tests completed on all welders over continuous runs
- Weld strength to be greater than 75% of the wire UTS
- Typical wire spacing of 100mm
- Wire diameters, spacing and overall dimensions can be customised to suit particular applications
- Customised paint lines along the modules to suit roof bolt patterns
- Available as strap from 4mm to 8mm diameters
- Custom high strength or seismic sheets available with double or additional wires if requested
- Available as plain or with galvanised corrosion protection

Packaging:

- Steel or plastic strapping
- Bundle sizes to suit the customer

Wire diameter (mm)	Weld Strength (kN)
4	4.7
5	7.5
5.6	9.4
Wire Grade	AS4671:2001 - Grade 500L
Galvanising	AS 2423:2001 W02Z >80g/m ²