


## Kanga Plate to suit Threaded and Temporary Rock Bolts

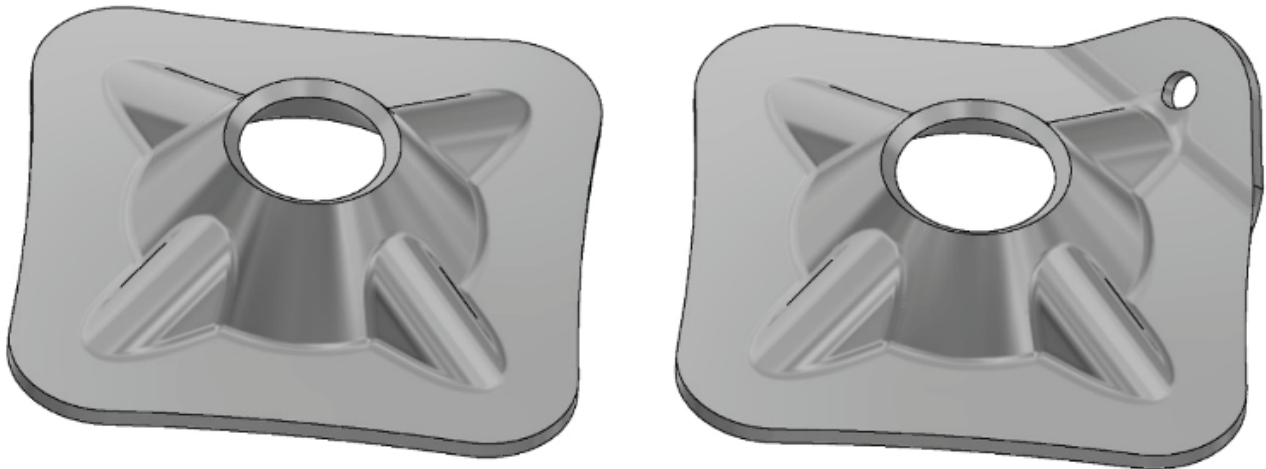

### Features:

- High load bearing characteristics
- Dome profile allows for 18° angles of alignment when installing the rock bolt with a domed ball washer or dome nut
- Light weight and rounded corners
- Lesser tendency to cut mesh upon loading
- Load rated hanger available to 50kg
- Available in black or galvanised
- Varying combination plate applications available

Square dimension (mm)	Thickness (mm)	Hole diameter (mm)	Minimum Collapse load (kN)	Minimum Pull Through load (kN)	Mass (kg)	Standard pack	Steel Grade
150 x 150	5	38	201	201	0.85	980/pallet	400
150 x 150	5	41	201	201	0.85	980/pallet	400
150 x 150	6	38	245	245	1.02	980/pallet	400

Available with hanger slots  
 Available Black or Hot Dipped Galvanised  
 Conformance Certificates provided for all Civil products