


RESIN CAPSULES & ACCESSORIES

POST GROUT CABLE FORMULA

Features

- Designed for Point Anchoring of cable bolts for tensioning prior to being Post Grouted
- NEW water based catalyst technology which has been introduced from the USA and South Africa.
- Catalyst compartment comprising 20 – 30% of the capsule volume compared to the traditional 5 – 10%
- Improved mixing of resins in larger diameter drill holes
- Cost effective
- Comes with resin retainer

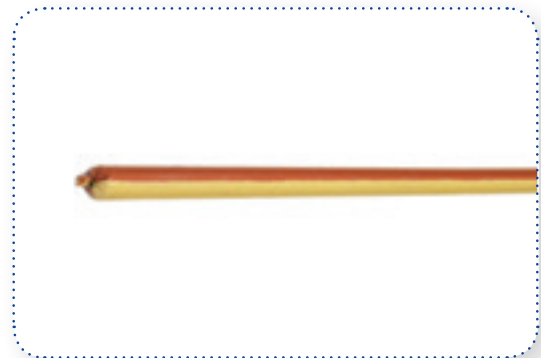

Typical packaging for standard 36mm diameter capsules is shown below:

Capsule Length (mm)	650	800 - 1100	1200
Quantity per Box	15	10	9
Quantity per Pallet	840	420	378

Shear Strength (MPa)	>22
Shelf Life	4 months

Speed		Approx Spin Time (secs)	Approx Time to Tension (mins)
M	Medium	10 - 15	>5
S	Slow	10 - 20	>10

*Relevant specifications are taken at 25°C



Capsules ≥ 1000mm in length: To mix, apply rotation and feed the bolt up through the capsule at a rate of 1 sec per 100mm of capsule (eg 1200mm capsule = 12 sec). Continue mixing at the back of the hole for an additional 2-4 seconds then wait for the resin to set.

Capsules < 1000mm in length: To mix, apply rotation and feed the bolt up through the capsule at a rate of 1 sec per 100mm of capsule (eg 600mm capsule = 6 sec). Continue mixing until the total mix time = 10 sec then wait for the resin to set